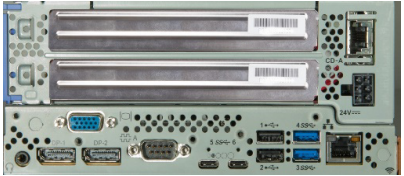











# TCx<sup>®</sup> 900 Distributed POS System Technical Specifications

FEATURES		
Product Name	TCx <sup>®</sup> 900	
Machine Type	4901	
Models	91C, C1C, E1C, 913, E13, 915, C15, E15, 917, E17	
CPU Support	Intel Celeron G6900E (91C, C1C, E1C) Intel Core i3 13100E (913, E13) Intel Core i5 13500E (915, C15, E15) Intel Core i7 13700E (917, E17) vPro supported (i5 & i7 models)	
Memory	8 GB, 16 GB or 32 GB DDR5 SODIMM Memory (up to 5600 MHz) - 2 Slots (up to 64 GB Max)	
Storage	256 GB, 512 GB or 1 TB PCIe NVMe M.2 SSD Up to 2x SSDs supported in 2 slots RAID Support (i5/i7 models) «E» models will include 1x 256 GB SSD preloaded	
Audio	Rear IO Panel headphone port	
Speaker	1x2W 8 Ohm	
Ethernet	Intel Gigabit Ethernet (Native) Integrated Intel WiFi 6E AX210 (Gig+) + Bluetooth 5.2 (Optional)	
Ports	<p><b>BACK</b></p> <ul style="list-style-type: none"> <li>(2) PC USB 2.0</li> <li>(2) PC USB 3.1 Gen 1</li> <li>(2) USB-C Locking [USB 3.1 Gen 1 + PD]</li> <li>(1) 9-pin RS232 (port A)</li> <li>(1) Ethernet</li> <li>(1) VGA</li> <li>(2) Display Ports</li> <li>SDL Cashdrawer (3A)</li> </ul> <p><b>FRONT</b></p> <ul style="list-style-type: none"> <li>(1) PC USB 2.0</li> <li>Dump Switch</li> </ul>	 
Filler Panel (Top Default)		
Powered Connector options (Bottom Default)	(5) 12V USB 2.0 (1) 24V USB 2.0	
Powered Connector options (Stand or Hub)	<ul style="list-style-type: none"> <li>(3) 12V USB 2.0</li> <li>(1) 24V USB 2.0</li> <li>(1) SDL Cashdrawer (3B)</li> <li>(1) RS-485 #9A Scan</li> <li>(3) RJ45 Powered RS232 (5V/12V)</li> <li>(2) 12V USB 2.0</li> <li>(1) 24V USB 2.0</li> <li>(6) 12V USB 2.0</li> <li>(3) RJ45 Powered RS232 (5V/12V)</li> <li>(3) 12V USB 2.0</li> <li>(1) 5V/12V/24V - USB-C Locking (USB 2.0 Gen 1+ PD)</li> <li>(4) 5V/12V - USB-C Locking (USB 2.0 Gen 1+ PD)</li> </ul>	    
Power Supply	Input: 100-240VAC, 50-60Hz, 4A@115VAC, 2A@230VAC Output: 24.0V, 10.42A, 250.08W	

PERIPHERALS (OPTIONAL)	
Displays	Toshiba TCx® Display Solution Toshiba SurePoint™ Solution 2x20 Single, Dual Sided Display (mounted to integration tray) APA (All Point Addressable) 2x10 Display (mounted to integration tray)
Printers	Toshiba TCx® Printers
Keyboards	Modular USB Keyboards: ANPOS, 67-Key and 67-Key with LCD
Cash Drawers	Compact Wide Flip-top

OPERATING SYSTEM	SUPPORT	SUPPORT POS DRIVERS	PRELOAD
TCx® Sky Ver 1.4 (x64)	Yes	Yes	No
Windows 10 IOT Enterprise LTSC 2021 (x64)	Yes	Yes	Yes (E models)
Linux Kernel V5.10.78 (x64)	Yes	Yes	No

ITEM	HEIGHT	WIDTH	DEPTH	WEIGHT
TCx 900 Distributed System	3.75 in (87.6 mm)	7.76 in (197.0 mm)	10.75 in (273.0 mm)	5.73 lbs (2.60 kg)



TCT15076-USEN-01  
Released July 26, 2023